

Product description

Mobile Scalping Screener RSS515



Features and benefits

The perfect scalping screen for any application

Optimum flexibility and mobility with the highest possible performance

Low cost solution that offers superior screening results

Heavy duty steel apron feeder as standard

Robust design with low machine weight

Up to 25 % greater fuel efficiency




Compact transport dimensions

Low feeding height

Quick set-up time

www.rockster.at

Measures & technical specifications

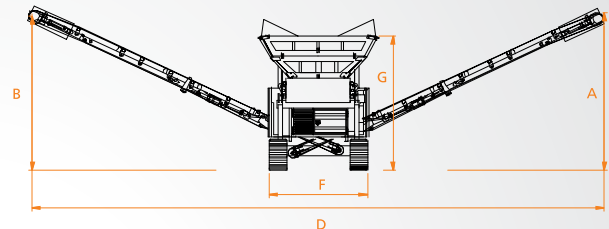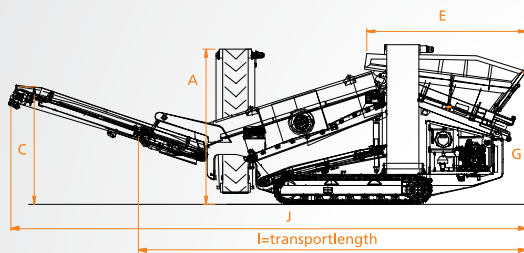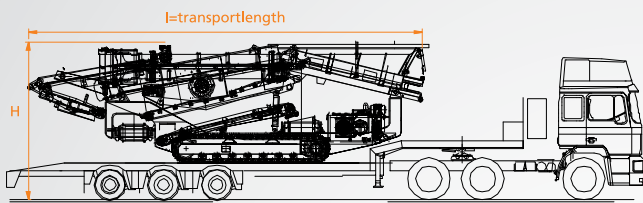

Working measures

A	4.060 mm	13' 4"
B	4.000 mm	13' 1"
C	3.000 mm	9' 10"
D	14.560 mm	47' 9"
E	4.000 mm	13' 1"

Transport measures

F	2.500 mm	8' 3"	Height	3.100 mm	10' 2"
G	3.433 mm	11' 3"	Width	2.500 mm	8' 3"
H	4.000 mm	13' 1"	Length	10.800 mm	35' 5"
I	10.800 mm	35' 5"	Weight	25,5 tons	56217 lbs
J	13.125 mm	43' 4"			

Feedhopper

Volume: 7 m³ 9,15 yd³
All three hopperwalls are foldable

Screenbox

Length: 4200 mm 14' 0"
Width: 1500 mm 5' 0"

Conveyor belt under screenbox

Length: 3500 mm 11' 5"
Width: 1200 mm 3' 11"

Oversize belt

Length: 5000 mm 16' 5"
Width: 1200 mm 3' 11"

Side conveyor left (fines)

Length: 8500 mm 27' 10"
Width: 800 mm 31"

Side conveyor right (mid fines)

Length: 8500 mm 27'10"
Width: 800 mm 31"

Trackdrive

Length: 3550 mm 11'7"
Width: 400 mm 16"

Power unit

DeutzDiesel engine, 74,9 kW 107 hp