

# Product description

## Mobile Scalping Screener RSS615





### Features and benefits

- High performance scalping screen for big jobsites
- Optimum performances also with difficult materials
- High flexibility and mobility with the highest possible performance
- Low cost solution that offers superior screening results
- Heavy duty steel apron feeder as standard
- Robust design with low machine weight
- Compact transport dimensions
- Short set-up time

[www.rockster.at](http://www.rockster.at)

## Measures & technical specifications

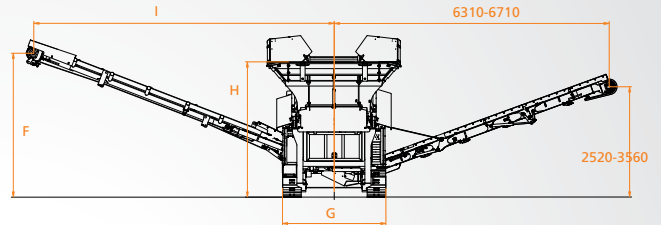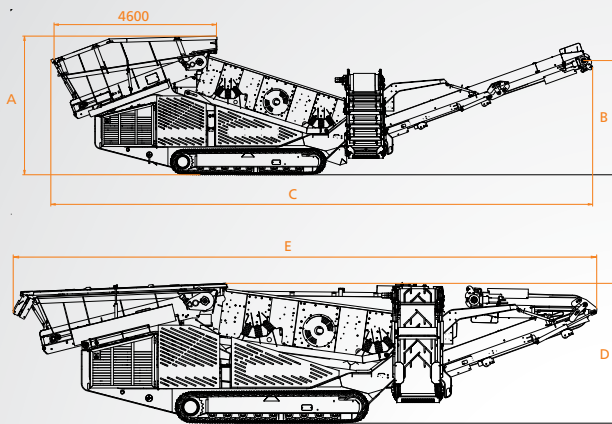

### Working measures

A	3.946 mm	13' 0"
B	3.250 mm	10' 8"
C	15.400 mm	50' 6"
D	3.200 mm	10' 6"
E	13.360 mm	43' 10"

### Transport measures

F	3.500 mm	11' 6"	Height	3.200 mm	10' 6"
G	2.550 mm	8' 4"	Width	2.720 mm	8' 10"
H	3.300 mm	10' 10"	Length	13.360 mm	43' 10"
I	7.350 mm	24' 1"	Weight	30 tons	66138 lbs

### Feedhopper

Volume: 8 m<sup>3</sup> 10 yd<sup>3</sup>  
All three hopperwalls are foldable

### Screenbox

Length: 4500 mm 15' 0"  
Width: 1800 mm 6' 0"

### Conveyor belt under screenbox

Length: 4200 mm 14' 0"  
Width: 1400 mm 4' 6"

### Oversize belt

Length: 6500 mm 21' 4"  
Width: 1500 mm 5' 0"

### Side conveyor left (fines)

Length: 8650 mm 28' 4"  
Width: 1000 mm 40"

### Side conveyor right (mid fines)

Length: 8500 mm 28' 0"  
Width: 800 mm 32"

### Trackdrive

Length: 3750 mm 12' 4"  
Width: 450 mm 18"

### Power unit

DeutzDiesel engine, 91 kW 125 hp